


Pleated blind films

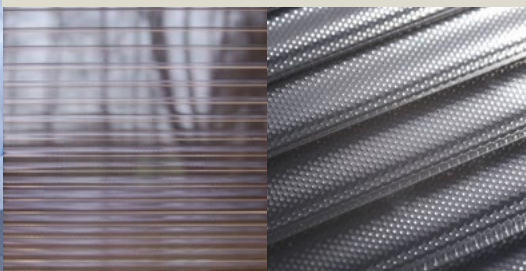

Through an own pleating process HAVERKAMP well-engineers its OPALFILM® films to special noble and high quality pleated films. By the consecutive work operations of film imprinting and final pleating the films are doubled well-engineered and get their long life cycle and their special surface stability. A good sight to outside and the well-known glare- and sun protection features of the OPALFILM® film systems stay naturally retained. The pleating of the film takes place with a pleated distance of 20 mm.

High-class quality and workmanship of the OPALFILM® pleated blind films ensure a simple and unproblematic installation to almost all kind of Plissees and guarantee a homogenous appearance in installed condition.


The Plisse films are offered in different versions each showing different heat-insulating properties as well as different UV-, blind and privacy protection. OPALFILM® pleated blind films could be installed in any pleated system.

The ennobled films are available as a standard in silver/grey 10R, silver/grey 2R, silver/white 0R, silver/bronze 10R as well as the flame retardant type silver/grey 2R B1.

The Saxony Textile Institute (STFI), part of the Technical University Chemnitz, confirmed and certified the high standard and quality of the OPALFILM® pleated blind films.

Standard film colors

Available in 1,52 m and 1,83 m width:

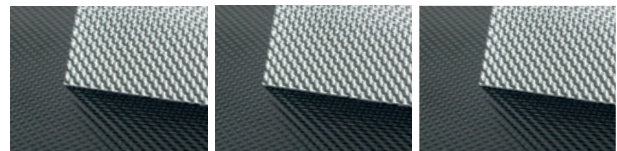


silver/grey 10R

silver/grey 2R

silver/grey 2R B1

Available in 1,52 m width:

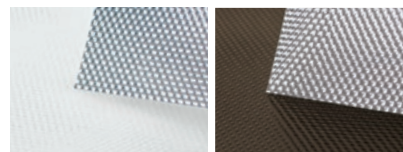


silver/white 0R

silver/bronze 10R

Other types on request.

Double refinement

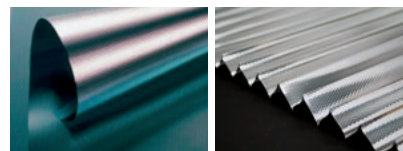

embossing

pleating